
Roll & Hill

T +1 718 387 6132
www.rollandhill.com

## CONTENTS

Cloud Sconce (120V/240V)

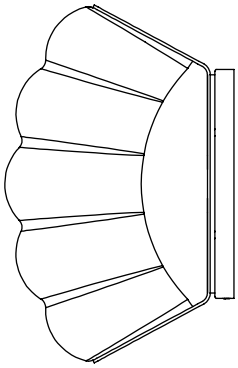


(x2) 8-32 J box Screw




(x7) Wago Connectors




Hex Key



Driver

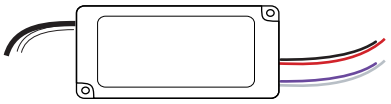


(x4) Toggle anchor
(240V only)




(x4) Metal screw
(240V only)




(x4) Wood screw
(240V only)



(x4) Long 8-32 screw
(240V only)



Driver Box
(240V only)

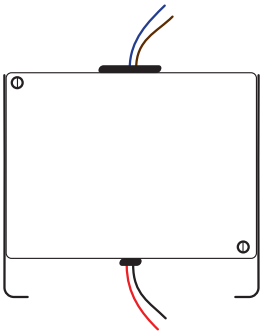

## SAFETY INFORMATION


UL damp rated.
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

T +1 718 387 6132
www.rollandhill.com

## CLOUD SCONCE (120V) | INSTALLATION

*Note: Please contact a licensed electrician.*

01. With the provided hex key (A), unscrew the set screw (B) from the fixture back plate (C), to release the crossbar with LED assembly (D).

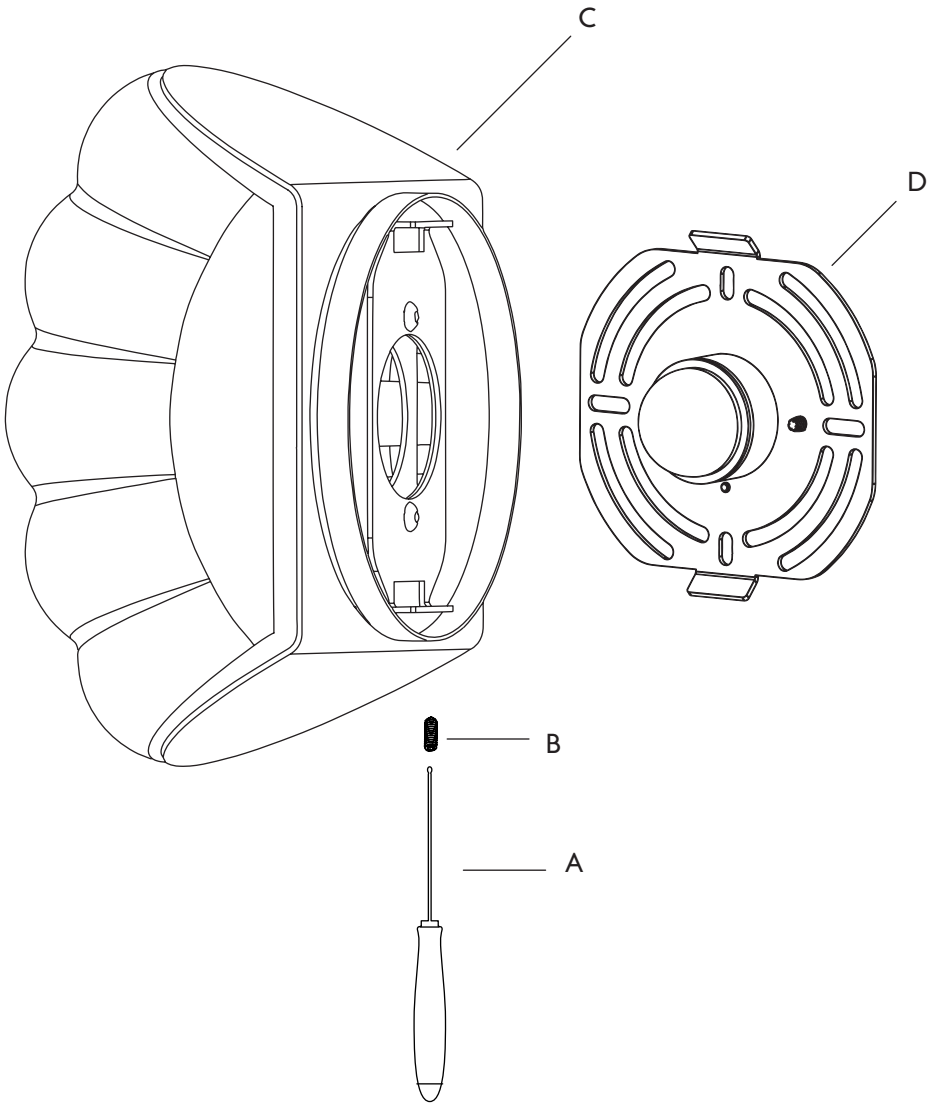


T +1 718 387 6132
www.rollandhill.com

## CLOUD SCONCE (120V) | INSTALLATION


*Note: Please contact a licensed electrician.*

02. Take the LED driver (E), and connect the lead wires with the provided 2-port wagos (F) from the J-box (G).
03. Optional, connect the dimming wires with the provided 2-port wagos (X)
04. Fit the LED driver inside the J-box and tuck in the lead and the dimming wires.

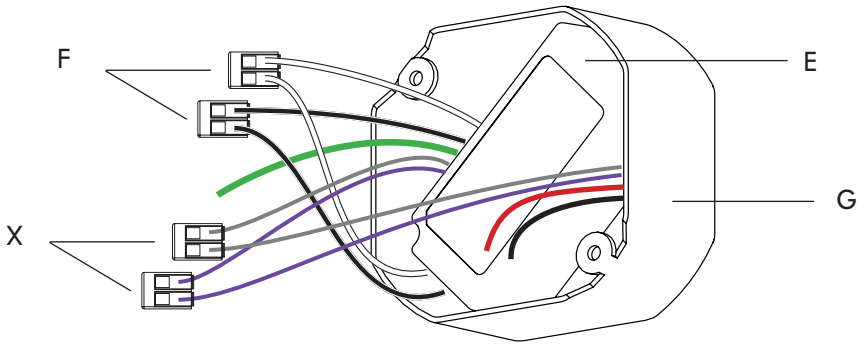


05. Bring the crossbar with LED assembly (D) up to the J-box (G), and make the ground wire connection using the provided 2-port wago (H).

06. Then make the low voltage wire connection with the provided 2-port wagos (I).

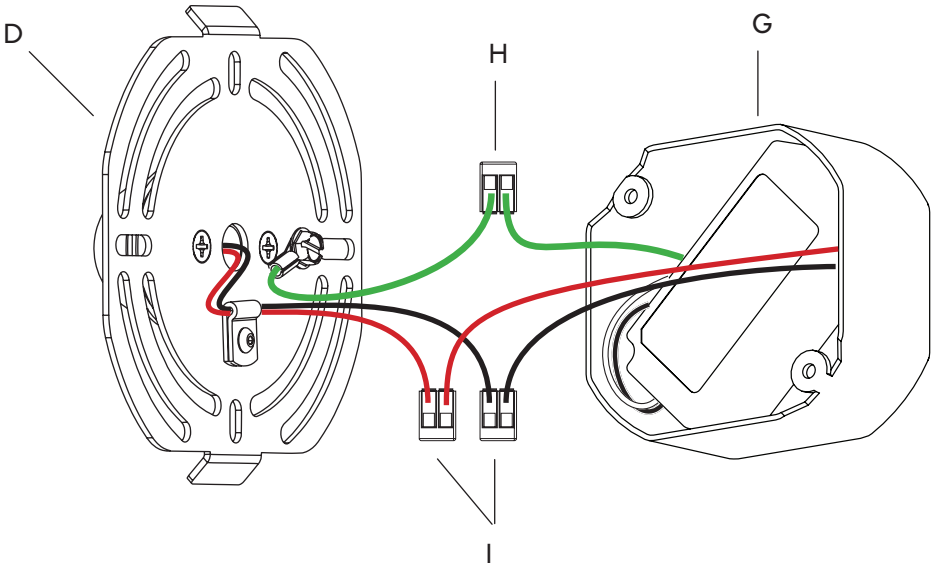


T +1 718 387 6132
www.rollandhill.com

## CLOUD SCONCE (120V) | INSTALLATION


*Note: Please contact a licensed electrician.*

07. Tuck all the wires into the J-box (G), and secure the crossbar assembly (D) with two provided 8-32 screws (J).

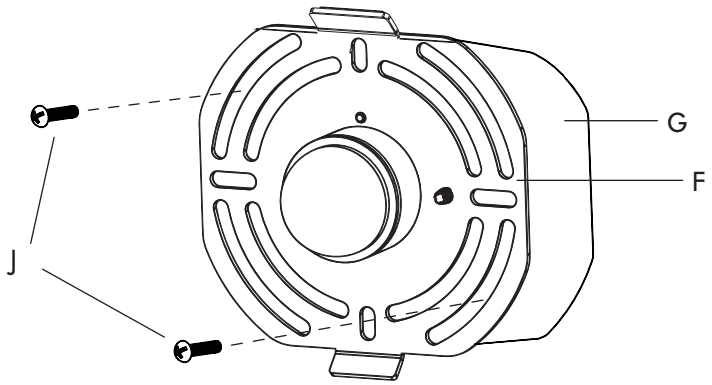


08. Hook the glass assembly (C) onto the french cleat of the crossbar assembly(D).

09. Using the hex key (A) secure the glass assembly with set screw (B).

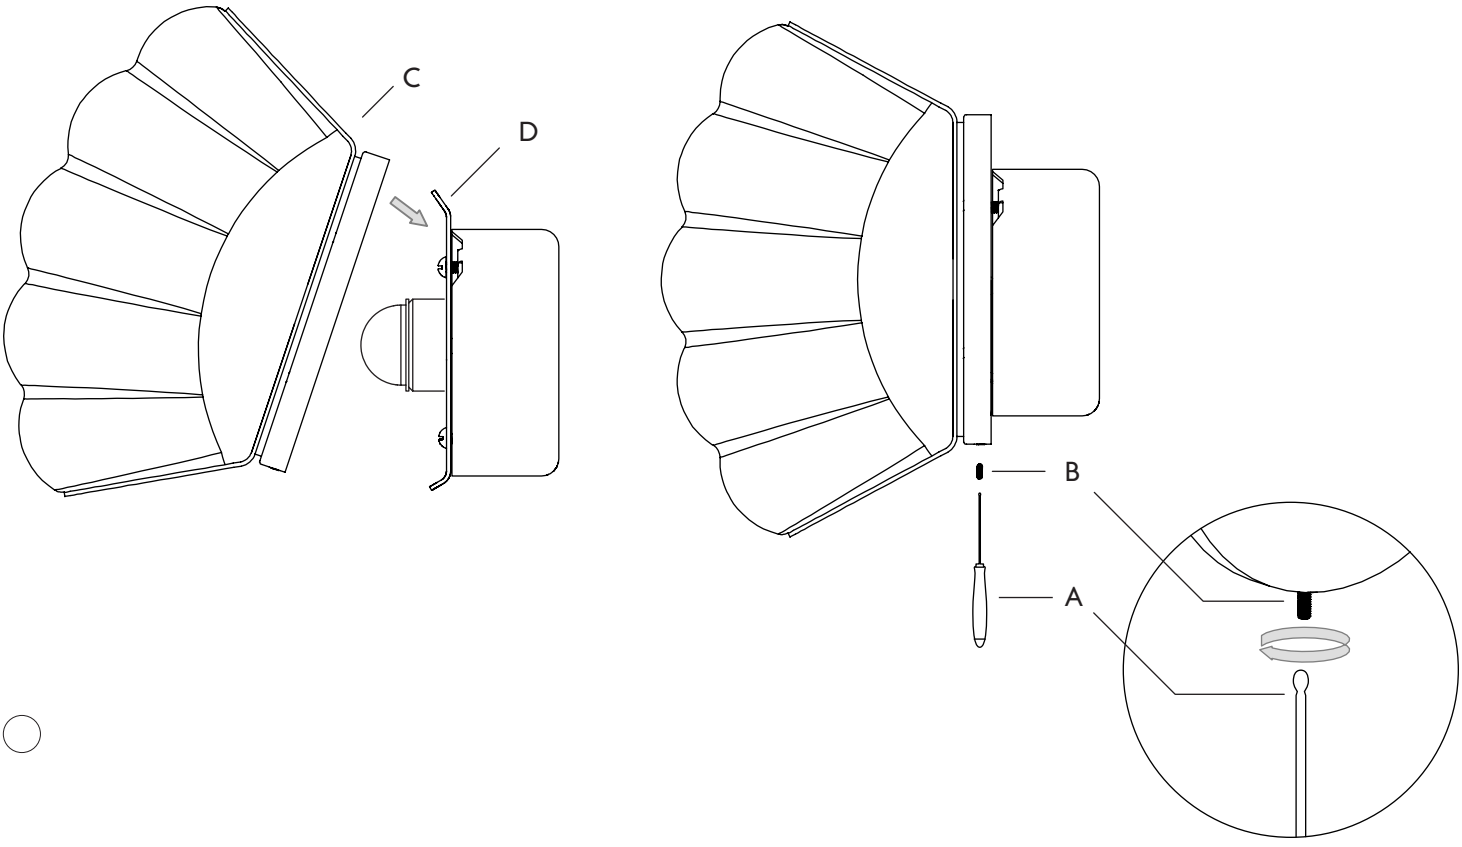


T +1 718 387 6132
www.rollandhill.com

## CLOUD SCONCE (240V) | INSTALLATION

*Note: Please contact a licensed electrician.*


01. With the provided hex key (A), unscrew the set screw (B) from the fixture back plate (C), to release the crossbar with LED and 240V driver enclosure assembly (D).

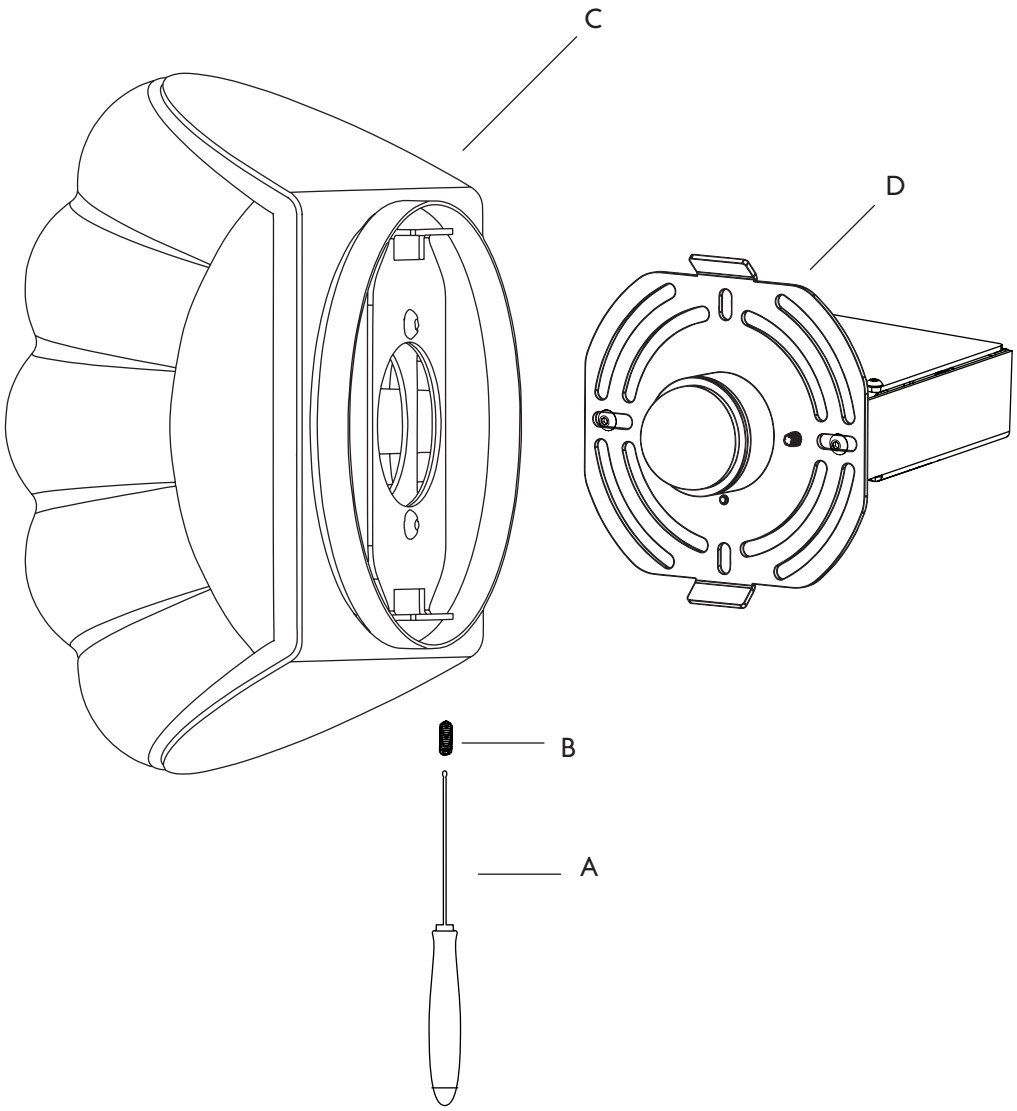

## CLOUD SCONCE (240V) | INSTALLATION

*Note: Please contact a licensed electrician.*

02. Connect the lead wires (E) to the power supply wires.
03. Optional, connect the dimming wires with the provided 2-port wagos (X)
04. Mount the crossbar to the wall using the provided screws (F).

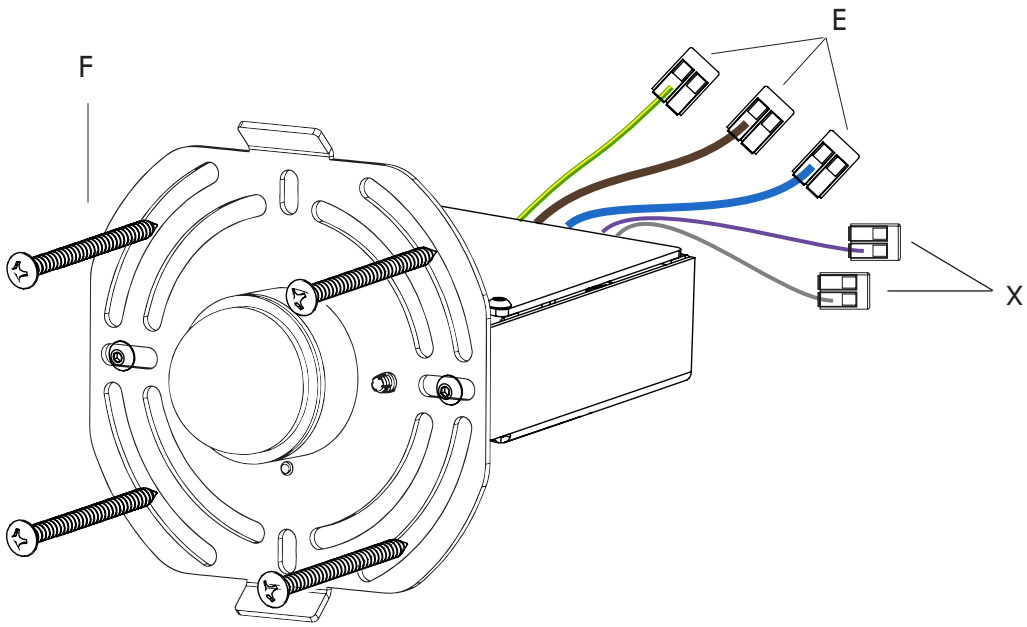

T +1 718 387 6132
www.rollandhill.com

## CLOUD SCONCE (240V) | INSTALLATION

*Note: Please contact a licensed electrician.*

05. Hook the glass assembly (C) onto the french cleat of the crossbar assembly (D).

06. Using the hex key (A) secure the glass assembly with set screw (B).

