


## CONTENTS

---

Sconce 02

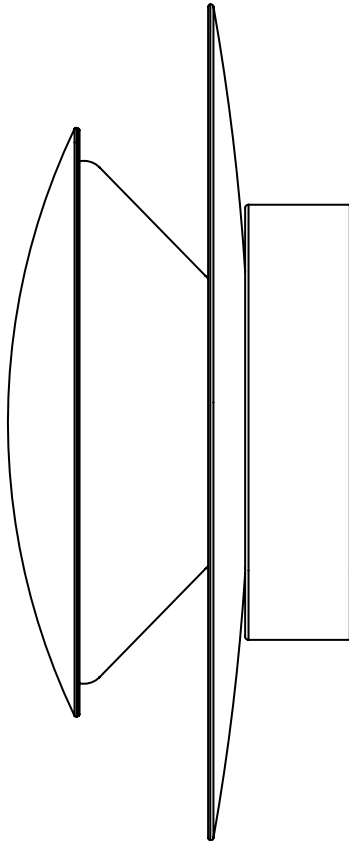


#8-32 Screws (2)



Canopy screws (3)



Crossbar



Wagos (5)



## SAFETY INFORMATION

---

Only suitable for direct mounting on non-combustible surfaces.  
Under no circumstances can Bell Sconce be mounted on normally flammable surfaces.  
Suitable for dry or damp, indoor use only.  
Maximum ambient temperature: 25° C

## WALL INSTALLATION

*Note: Please contact a licensed electrician.*

1. Install the custom crossbar (A) to junction box (B) using #8-32 screws (C). It is recommended to pull the main wires out so they are accessible while making the main connection later.
2. Connect the lead wires with provided wago's (D) from the junction box to the lead wires from LED driver located in the canopy (E). (Optional: Connect the 0-10V dimming wires (F) as needed)
3. Then, connect the green ground wire with the provided wago connector (G).
3. Raise the fixture over the custom crossbar (A) and secure it in place with three provided canopy screws (H).

