



CONTENTS


Del Playa Ceiling Mount 4 Arm

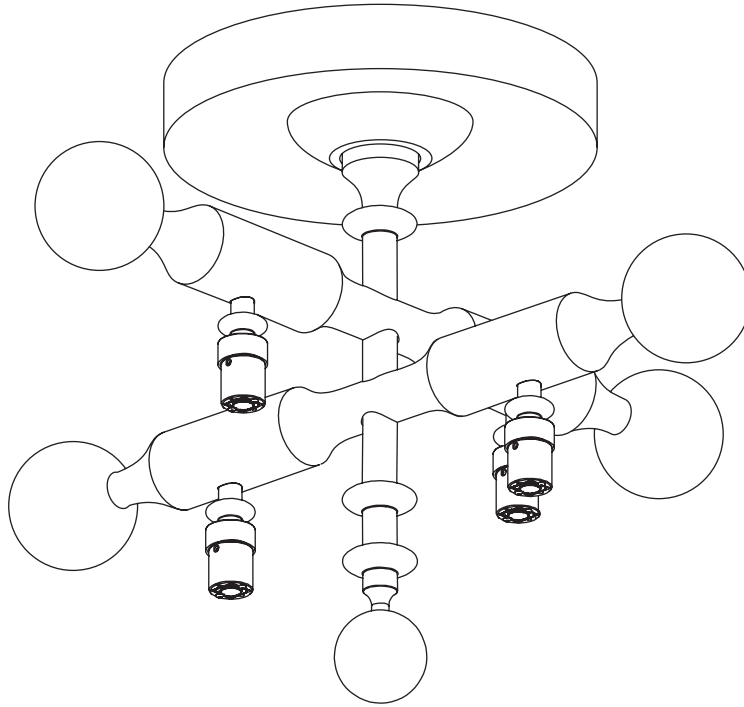

(4x) Del Playa Shade



(4x) 2" Diffuser








(4x) Collar and O-ring



(x5) Wago Connectos



<p>(x2) Metal screw On 240V fixtures only</p> 	<p>(x2) Wood screw On 240V fixtures only</p> 	<p>(x2) Long 8-32 screw On 240V fixtures only</p> 	<p>(x2) Toggle anchor On 240V fixtures only</p> 	<p>(x2) 8-32 J box Screw</p> 
---------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------

SAFETY INFORMATION

Suitable for dry, indoor use only.


Maximum ambient temperature: 25°C

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

DEL PLAYA CEILING MOUNT 4 ARM | INSTALLATION

Note: Please contact a licensed electrician.

1. From the canopy assembly, unscrew the canopy nut (A), to release the canopy (B), to reveal crossbar (C).
2. Slide the canopy nut (A), and canopy (B), down as much as possible.
3. Bring the fixture up to the J-box (D), then feed the lead and ground wires (E) from the j-box, through one of the holes on the crossbar.
4. Then secure the crossbar to j-box using the provides 2 screws (F).

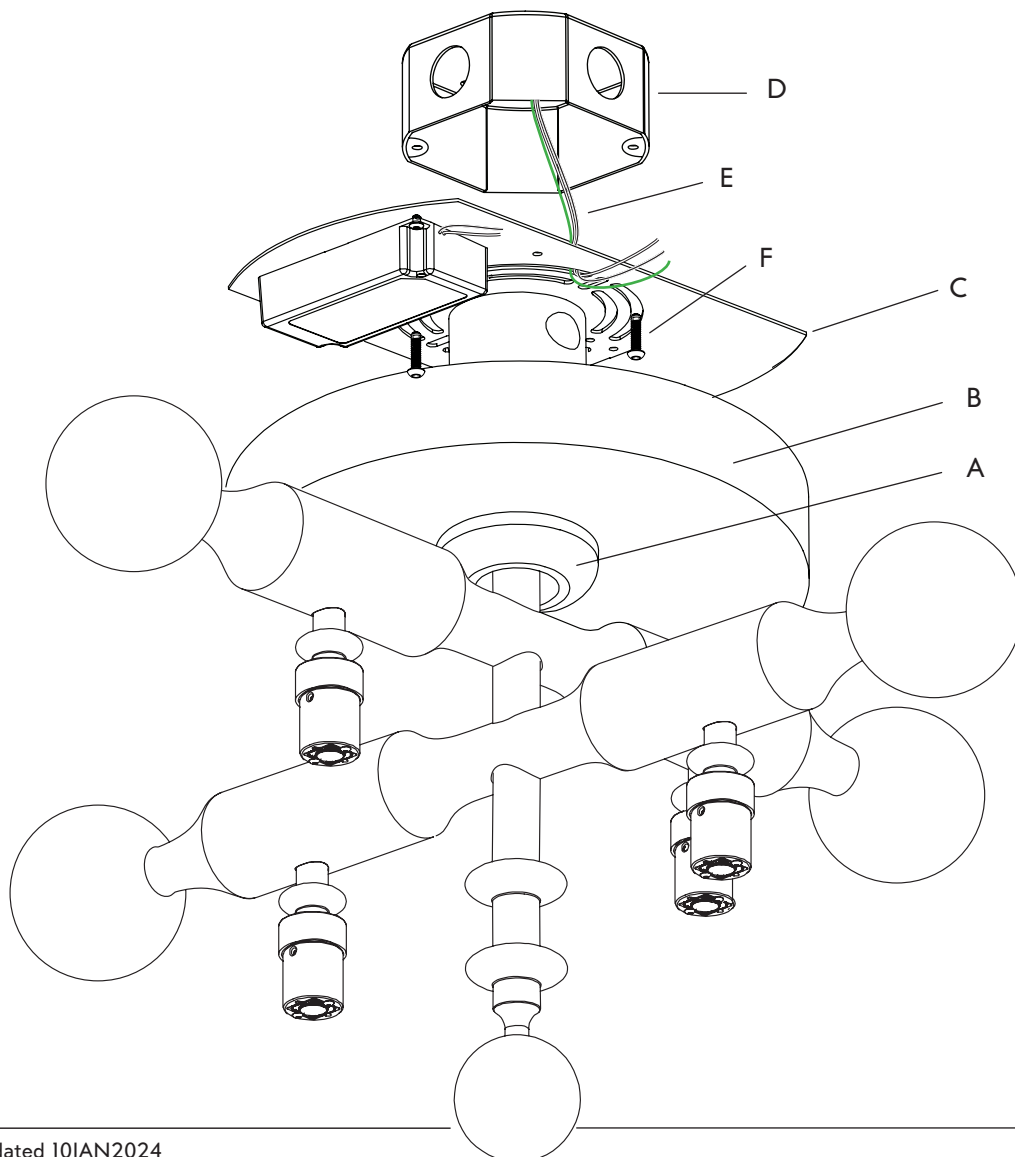


DEL PLAYA CEILING MOUNT 4 ARM | INSTALLATION

Note: Please contact a licensed electrician.

5. Make the lead wire connection from the J-box to LED drivers using the provided 2-port wagos (G).
6. Connect the ground wires using the provided 2-port wagos (G).
7. Optional, connect the dimming wires using the provided 2-port wagos (I).
8. Double check that all the low voltage wires (J) are connected.


NOTE: Canopy is transparent in the drawing below.

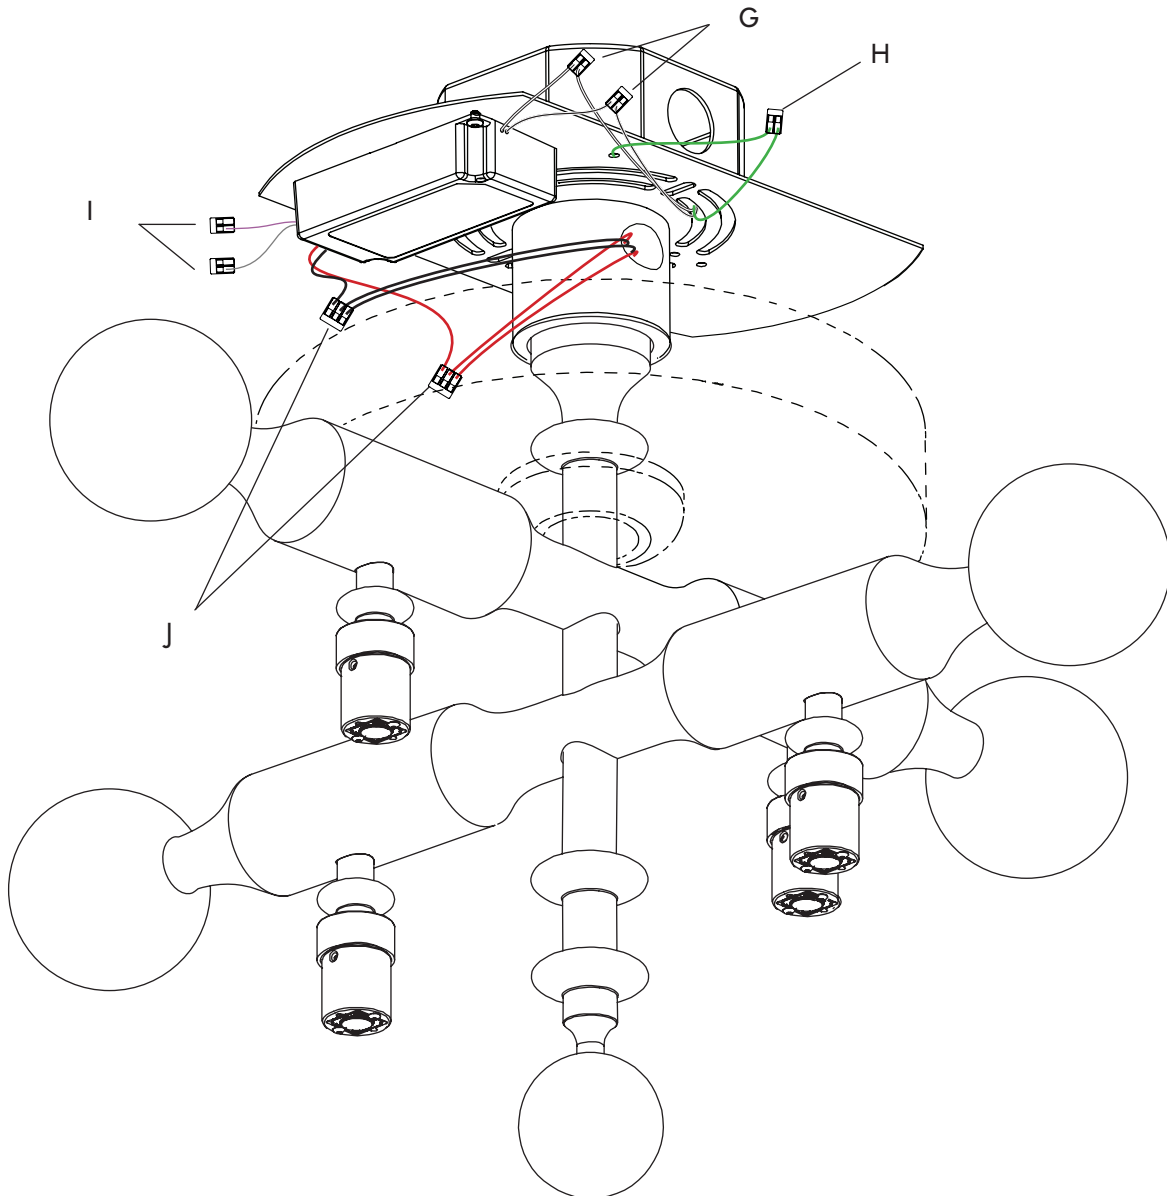

DEL PLAYA CEILING MOUNT 4 ARM | INSTALLATION

Note: Please contact a licensed electrician.

9. After all the connections have been made, raise the canopy (B) over the crossbar, and tuck all the wires inside. Then secure the canopy with a canopy nut (A).

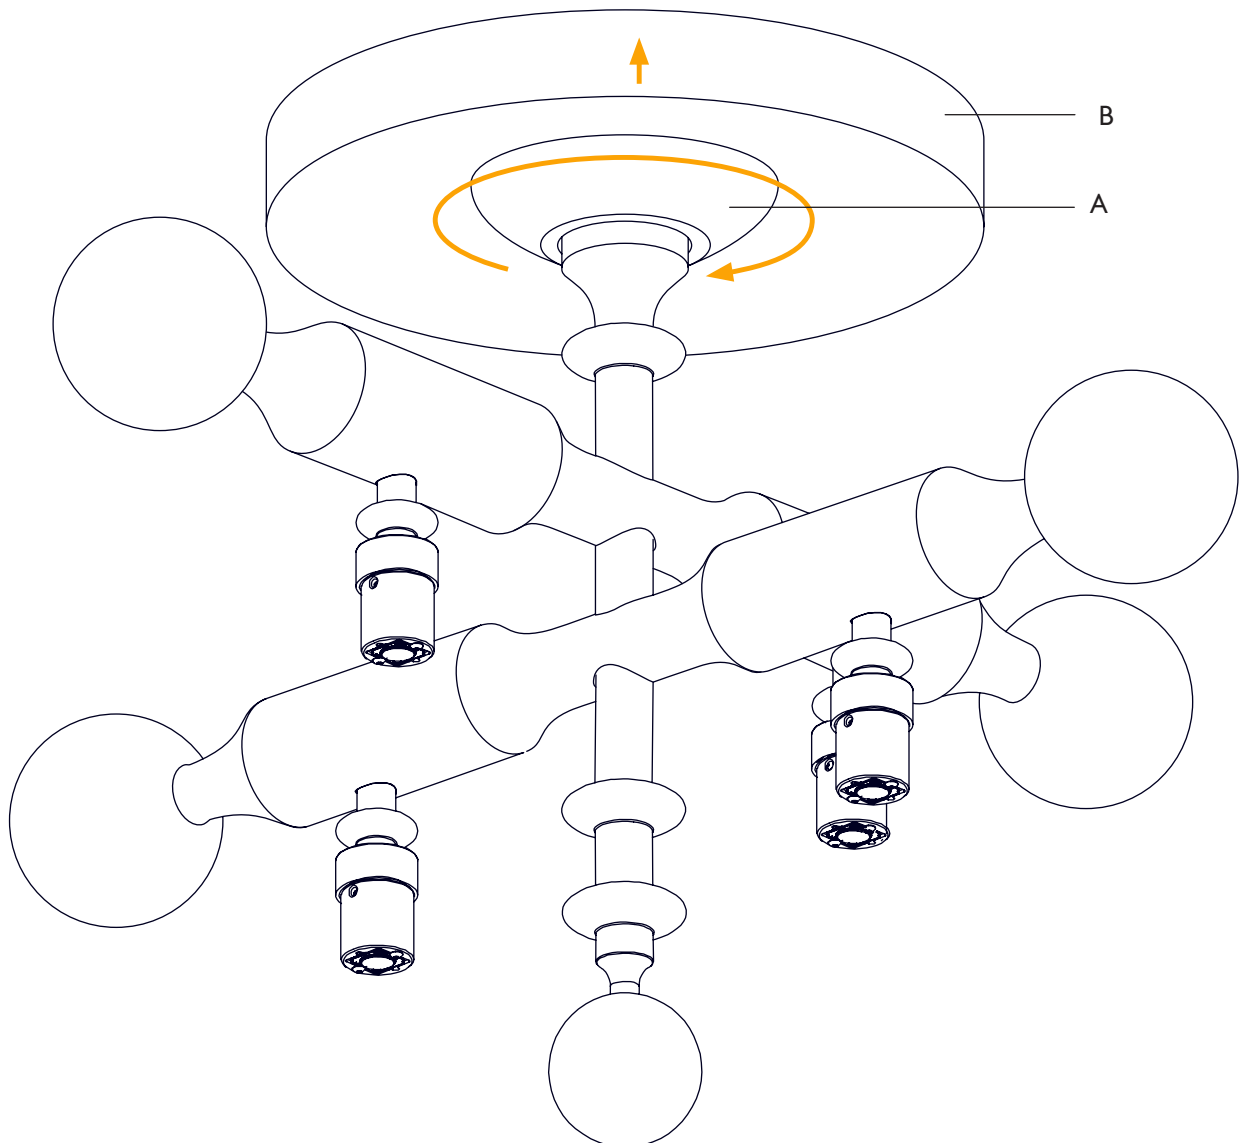

DEL PLAYA CEILING MOUNT 4 ARM | INSTALLATION

SHADE INSTALLATION

1. Fit the shade (A) onto the LED cup (B), and secure it with collar (C) and O-ring (D). Then screw on the LED diffuser (E).

